

THE CONSORT INVICTUS FIRE DOOR RANGE

All the good looks, design and superior performance of the original Consort Invictus Composite Door, with the added benefit of being fire and smoke resistant for an all important 30 minutes.

All five classic styles of this outstanding door are available in four striking colours on the outer with a white inner. The Thermoset GRP skin, with natural woodgrain effect, has been UV tested to withstand strong sunlight, giving unrivalled colour fastness.

Kitemark licensed to PAS 23 and PAS 24, the latest and most stringent BSi security standards, the Consort Invictus Fire Door comes complete with a ten year product guarantee.

ADDITIONAL BENEFITS

Individually made to measure, this FD30s rated door will provide 30 minutes protection from flames and heat in accordance with BS476 Part 22. Intumescent strips throughout.

70mm Outer Frame to BS EN12608 with unique steel reinforcing and flame retardant material filled chamber.

GLASS

Inner Pane

Tough 4mm (Standard) or 6.4mm Laminated

Outer Pane

7mm Georgian Wire Cast Pyroshield 2

26mm sealed units toughened as standard, held with steel security clips and sealed with intumescent strips.



COLOURS



White
RAL9016



Green
RAL6009



Red
RAL3013



Dark Blue
RAL5011


STYLES




Invictus
Fire 1




Invictus
Fire 2

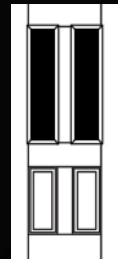

Invictus
Fire 4

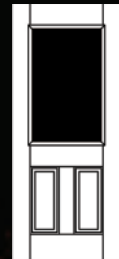

Invictus
Fire 6

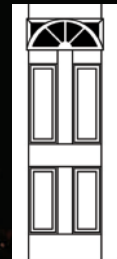

Invictus
Fire 8




www.consortwindows.com

SPECIFICATIONS

Door construction	Our GRP colourfast doors are available in 4 colours (outer skin). Inner skin – grained GRP moulded skins in white with fire retardant inner core
Locking mechanism	Multipoint stainless steel lock as standard/Auto engaging (AV2) multipoint lock available on request
PVC outerframe	Fully reinforced 70mm door outerframe designed specifically for 68mm thick door sash
Glazing cassette	Complies to the requirements of PAS23 & PAS24 weather performance & security standards, Secured by Design
Reinforcement	Galvanised steel reinforcement section
Furniture colour	Fully suited with all product offerings – salt spray tested
Threshold options	Aluminium Part M compliant
Handle type	Lever/Lever handles with key/thumbturn cylinders
Hinge type	Steel Butt Hinges (non-adjustable)

Door closers	Fully adjustable, concealed or overhead door closer
Glass	26mm sealed units toughened as standard, held with steel security clips and sealed with intumescent strips
Accreditation	PAS23 & PAS24, Secured by Design. 30 minute fire rating BS476 Part 22. Fire door rating FD30S

CONSORT INVICTUS FIRE DOOR

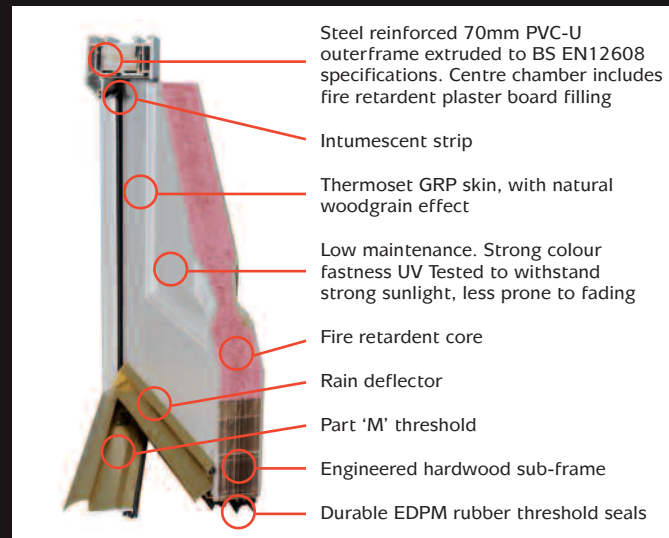

Consort Limited, Units 1-4 Export Drive, Huthwaite, Sutton in Ashfield, Nottinghamshire NG17 6AF
Tel: 01623 440 880 Fax: 01623 440 396 www.consortwindows.com

© Copyright Consort Ltd. Consort have made every effort to ensure that the information contained in this brochure is correct at the time of publication, but cannot be held responsible for any errors or omissions and reserves the right to change designs, specifications and products at any time without prior notice. Colours are as accurate as printing process allows.